


Length tolerances:


No.	Length	Tolerance
1	L≤10M	+200mm/-0
2	10M<L≤30M	+250mm/-0
3	L>30M	+10%/-0

Optical cable structure diagram

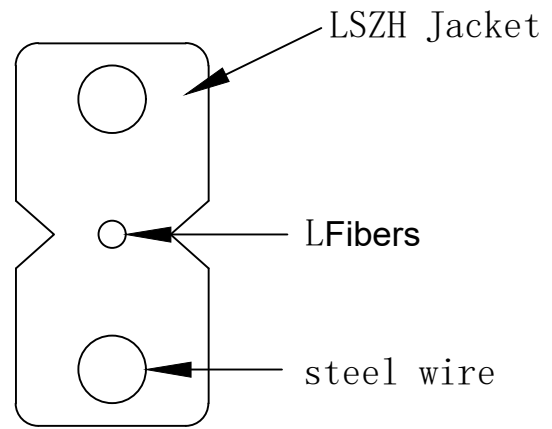

Specification:

- 1.Connector A : SC/APC-SM
- 2.Connector B : SC/APC-SM
- 3.Cable Type : GJXH-1B1.3 is a Flat (Drop) Cable with 1 Fibers. Fiber Standard is G657A1CableLSZH Dimension: 2.0*3.0±0.1 mm, Steel wires OD.: 2*0.45mm steels
- 4.Jacket Color : Black
- 5.Wavelength : 1310/1550nm
- 6.Insertion Loss: SC/APC: ≤0.3dB ≥60dB
- 7.Packaging, labeling : Packaging and labeling neutrality requirements

X° ± 0.5°	UNITS: mm	DATE: 2024/12/23	NAME: Outdoor leather wire fiber optic patch cordSC/APC-SC/APC-SM-SX-G657A1-LSZH -5m-black			
.X° ± 0.1°		PART NO:				
.XX° ± 0.05°	MAT'L:		DWG NO: Leather wire fiber optic patch cord			
.XXX° ± 0.01°	FINISH:					
X. ± 0.1	NOTES	APPD:				
.X ± 0.05		CHKD:				
.XX ± 0.01		Q'TY:	DR:		SCALE	SHEET
.XXX ± 0.001		1:1			1/1	1.0